




# 4-Way Stripline Power Divider

Rev.A2016

## MODEL D-0426-4

### OUTLINE DRAWING

UNIT: INCH

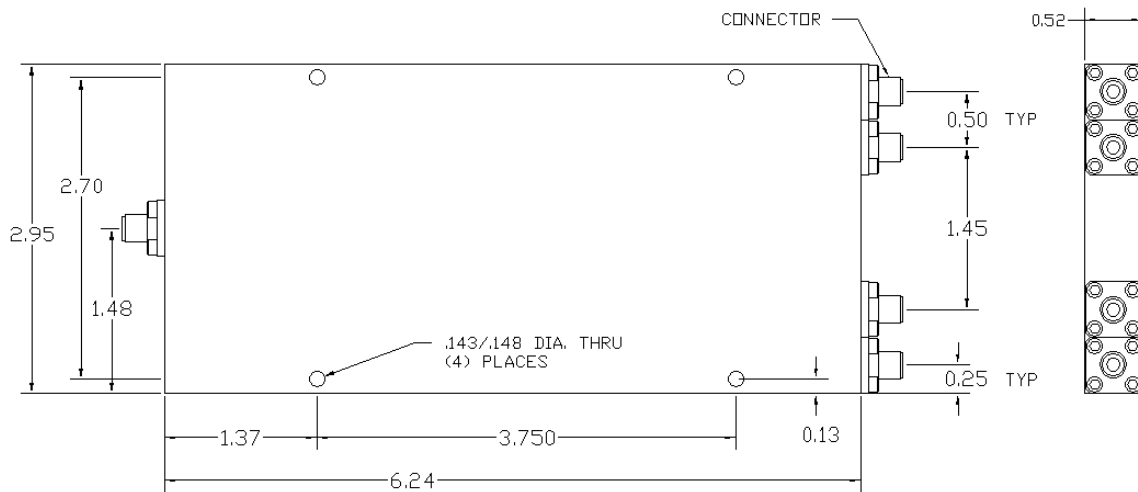

#### ELECTRICAL SPECIFICATIONS

<b>FREQUENCY RANGE</b>	<b>0.4-26.5</b>	<b>GHz</b>
<b>INPUT VSWR</b>	Max. <b>0.4-2.0:1.80</b> <b>2.0-26.5:1.65</b>	
<b>OUTPUT VSWR</b>	Max. <b>1.60:1</b>	
<b>AMPLITUDE BALANCE</b>	Max. <b>0.50</b>	<b>dB</b>
<b>PHASE BALANCE</b>	Max. <b>6.0</b>	<b>Deg.</b>
<b>INSERTION LOSS</b>	Max. <b>4.00</b>	<b>dB</b>
<b>ISOLATION</b>	Min. <b>0.4-2.0 :15.0</b> <b>2.0-26.5:18.0</b>	<b>dB</b>
<b>POWER RATING</b>	Avg. <b>20.0</b> Peak <b>3.0</b>	<b>W</b> <b>kW</b>

#### PHYSICAL SPECIFICATIONS

<b>CONNECTOR TYPE</b>	<b>SMA Female (Jack)</b>
<b>WEIGHT</b>	Max. <b>14.9</b> <b>Oz</b>
<b>OPERATIONAL TEMP.</b>	<b>- 32 to + 85 °C</b>



**Electromagnetic Technologies Industries, Inc. (ET Industries)**  
 50 Intervale Road, Boonton, NJ, 07005, USA E-Mail: sales1@etiworld.com  
 Phone: 001+(973)-394-1719 Fax: 001+(973)394-1710 www.etiworld.com